


ASHBY HEADBOARD

Gather Your Eggs...



Headboard Tiles (Amount and Length Depend on Configuration)




Uprights (Amount, Length and Hole Quantity Depend on Configuration)



Screws



Drywall Anchors





Level


Not included: Pencil for marking mounting locations, measuring tape, screwdriver

Note: Please retain all boxes until you are certain that your product isn't damaged and that you do not wish to return it. Disposal of boxes may prevent/delay our ability to resolve your request.

Reference Diagram

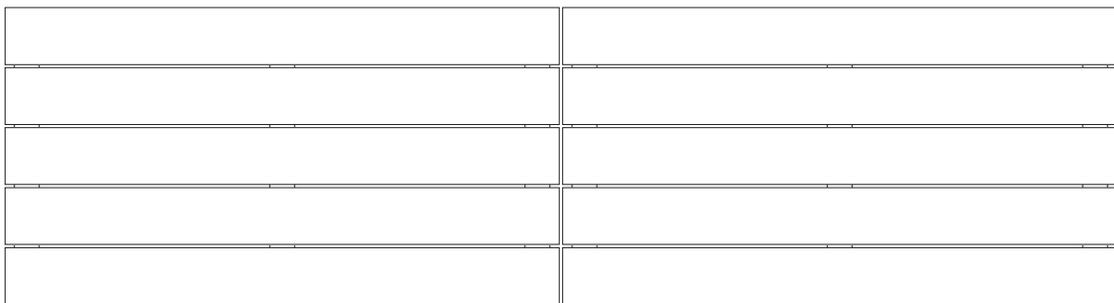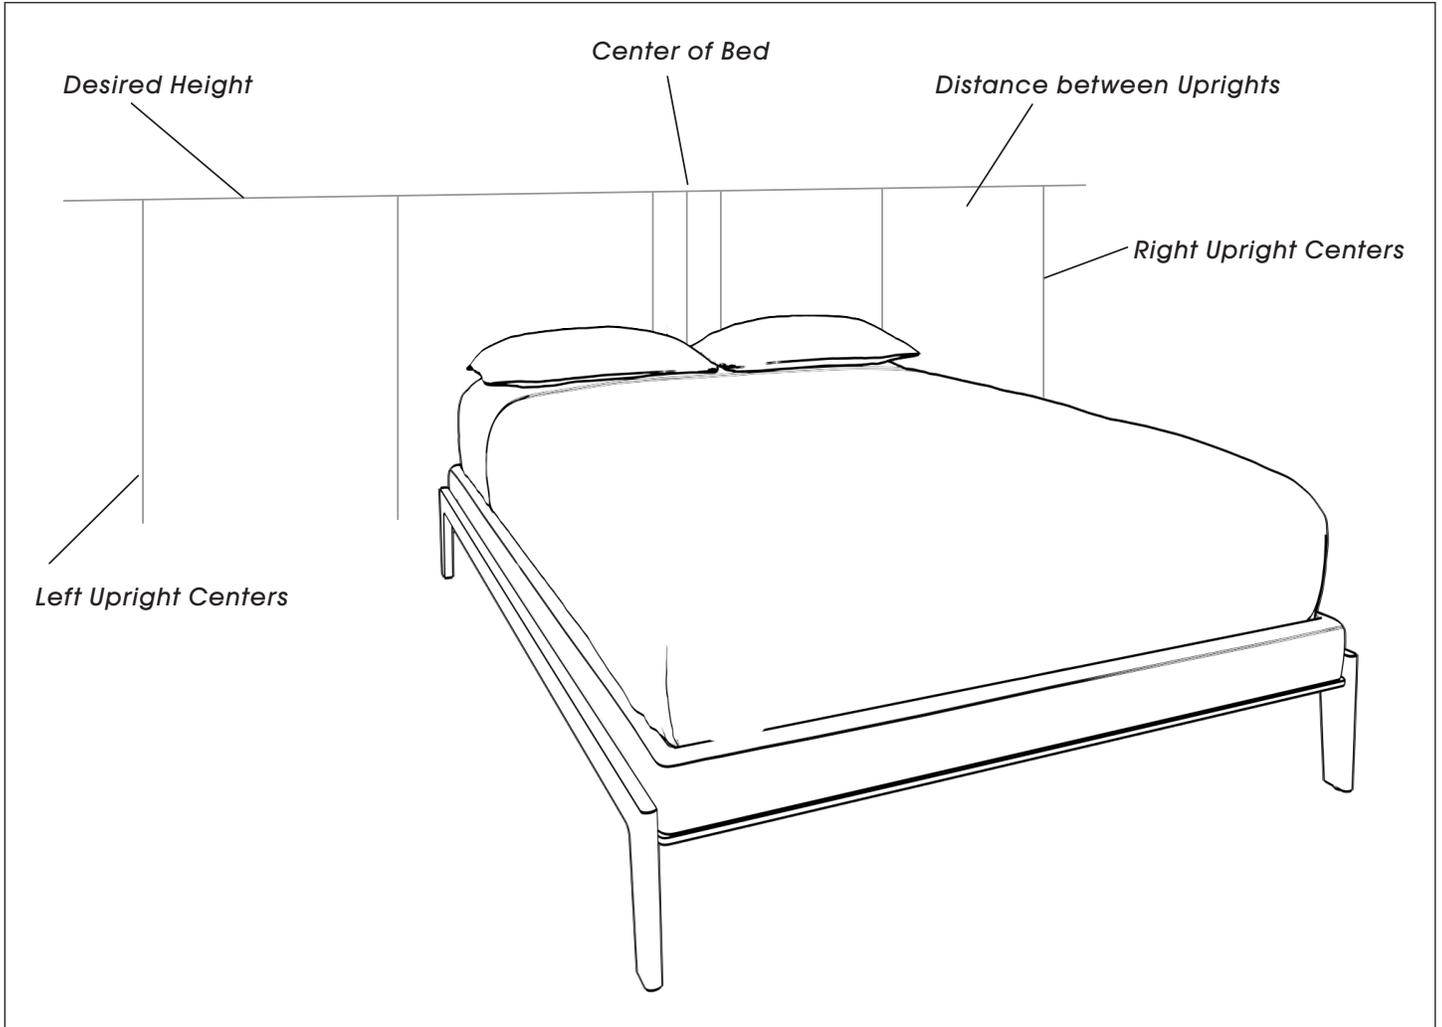


Assembled Headboards: Front

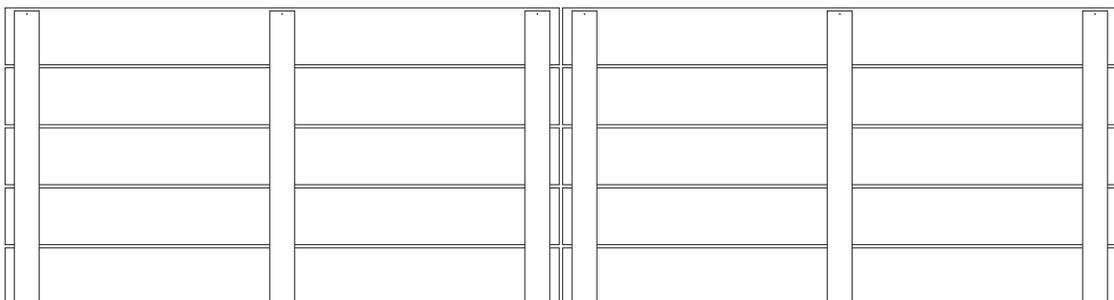


Assembled Headboards: Back

Step 1: Mark Your Center Height

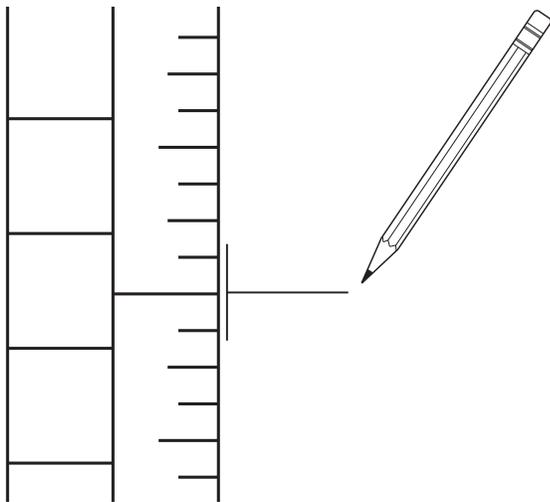

Mark your desired height by placing a crosshair at the center of where your headboards will be mounted. Headboard will stick up $\frac{3}{8}$ of an inch from this mark.


Step 2: Mark Inside Center Widths

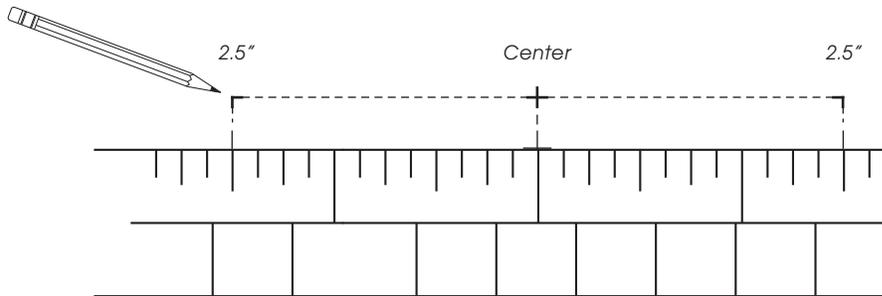

Mark distance 2.5" from center point for the two inside uprights.


Step 3: Mark Remaining Center Widths

Mark distance 'A' from center point for left and right uprights.

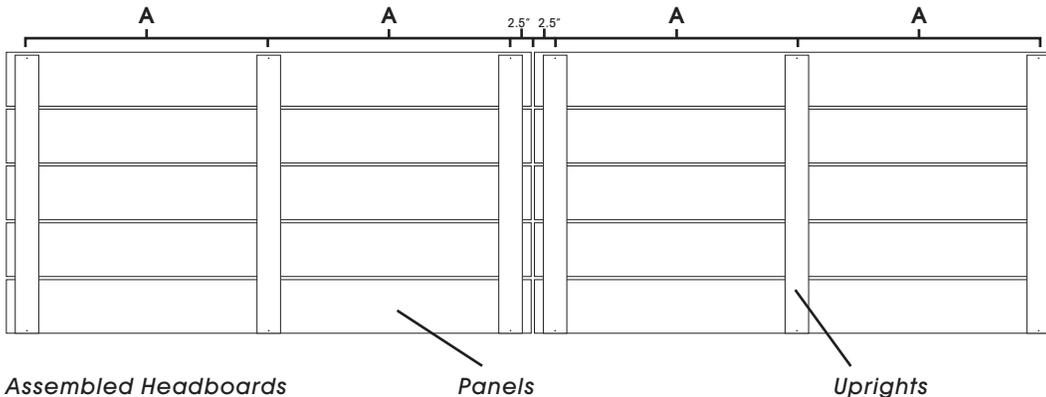


HEADBOARD SIZE	DISTANCE "A"
Twin Double	19.5"
Full Double	25"
Queen Double	25"
King Double	31.5"
Cal King Double	31.5"

Step 4: Mark Your Upright Height

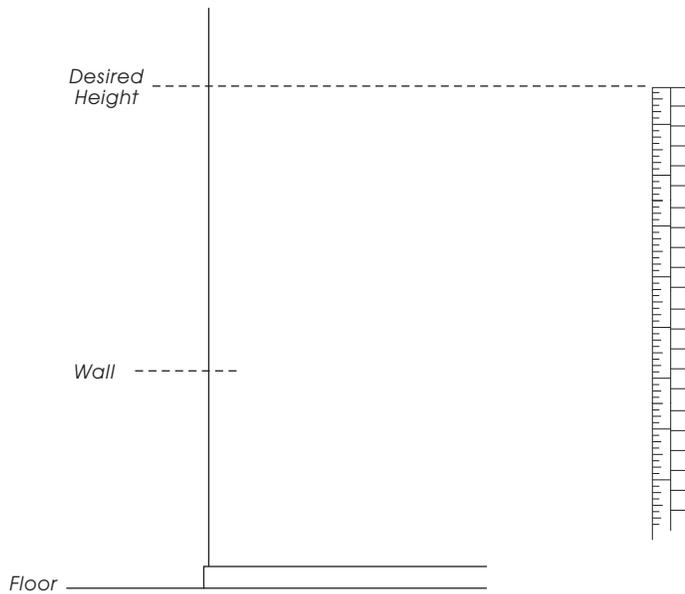

Measure from the floor to your initial desired height, marking that height at each of your marked vertical lines.

Step 5: Mark Upright Width

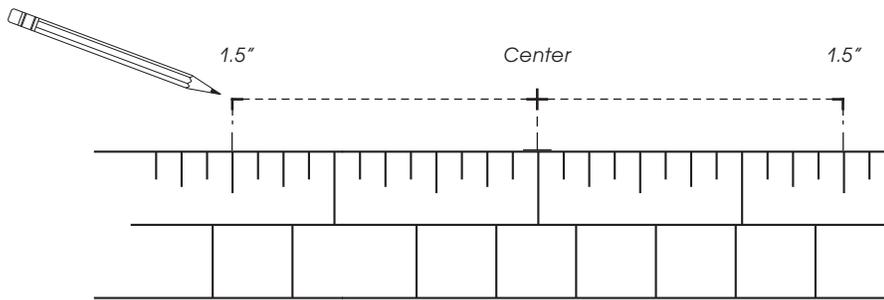

Measure and mark 1.5" on each side of the center vertical lines for all your uprights.

You should end up with markings for every upright like the diagram shown here.




Step 6: Remeasure

Remeasure all lines to verify you have marked the correct locations.


Check for studs at marked locations. If your markings land on a stud, omit the drywall anchor at that location for future steps.

Step 7: Drill Pilot Hole


Align Uprights. Place your upright upside-down. Use the hole in the bottom of the upright to help guide a provided screw. Gently drill in screw just enough to mark the drywall.

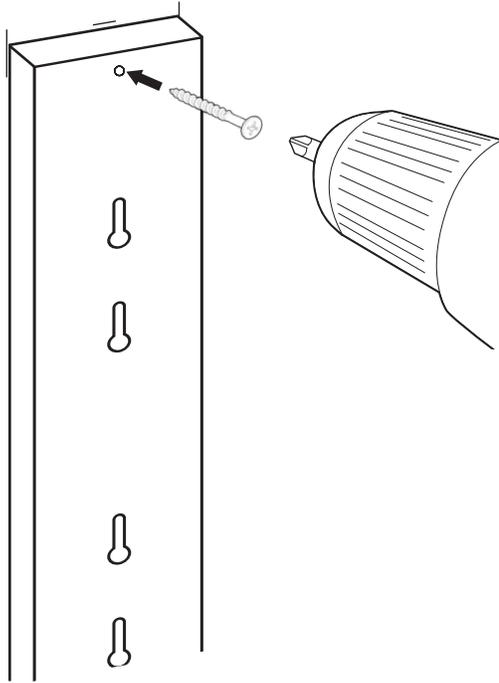

Remove the Upright slat.
Verify the pilot hole.

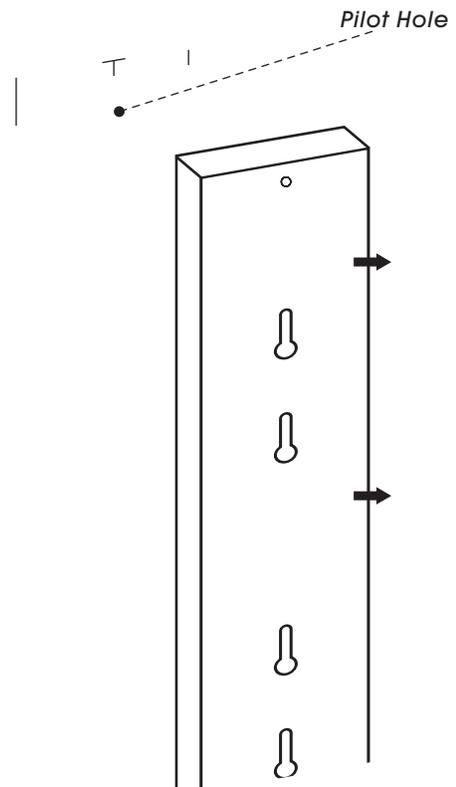


Step 8: Drill Into Drywall

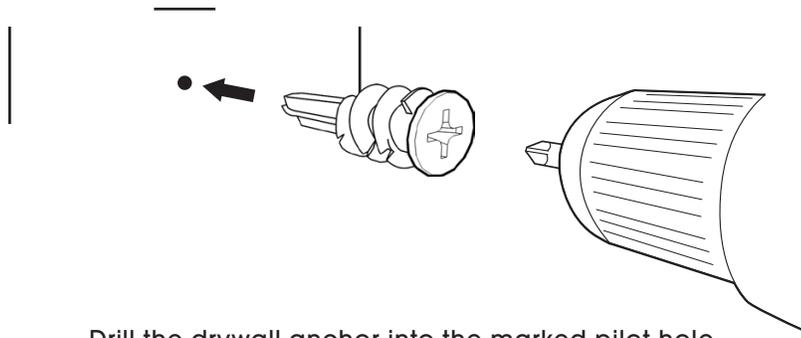

Drill the drywall anchor into the marked pilot hole.

NOTE: The Upright will have the slotted hole at the top and the keyholes will be more narrow in the front.

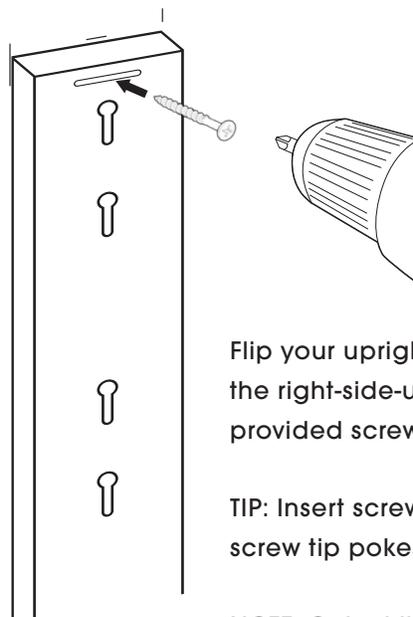


Flip your upright with the slotted hole at the top (this is the right-side-up). Attach Uprights to wall anchors using provided screws.

TIP: Insert screw part way through the upright so the screw tip pokes out to make alignment easier.





NOTE: Only drill into the top holes at this point.

All six Uprights should look like this. The bottoms should swing somewhat freely.




Step 9: Place Headboard Panels

Attach all headboard panels except the bottom one. Start from second lowest and work your way up. Push the screw heads of the headboard panel into the slots on the upright and sliding down.

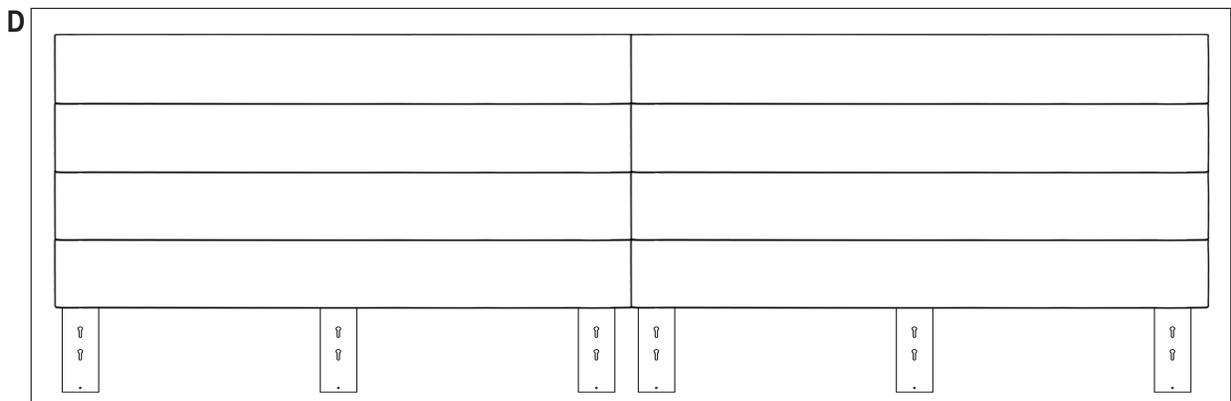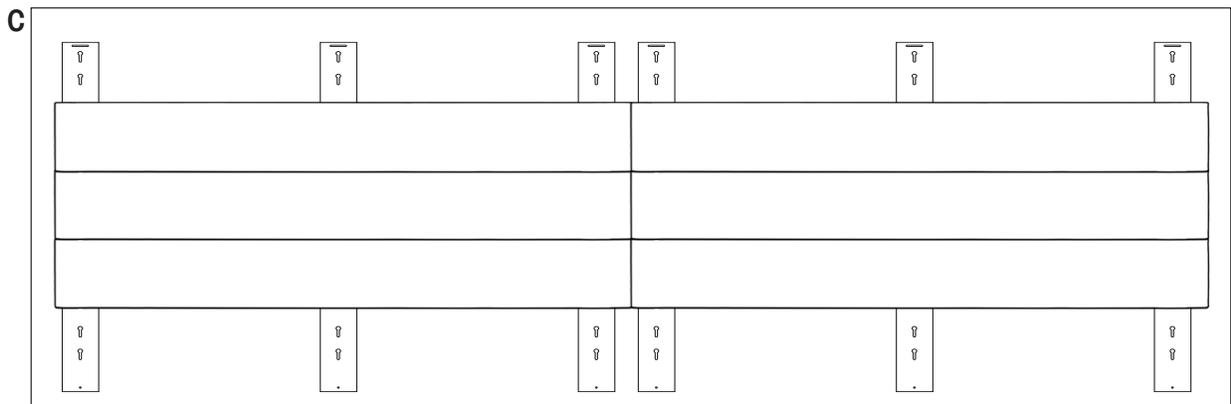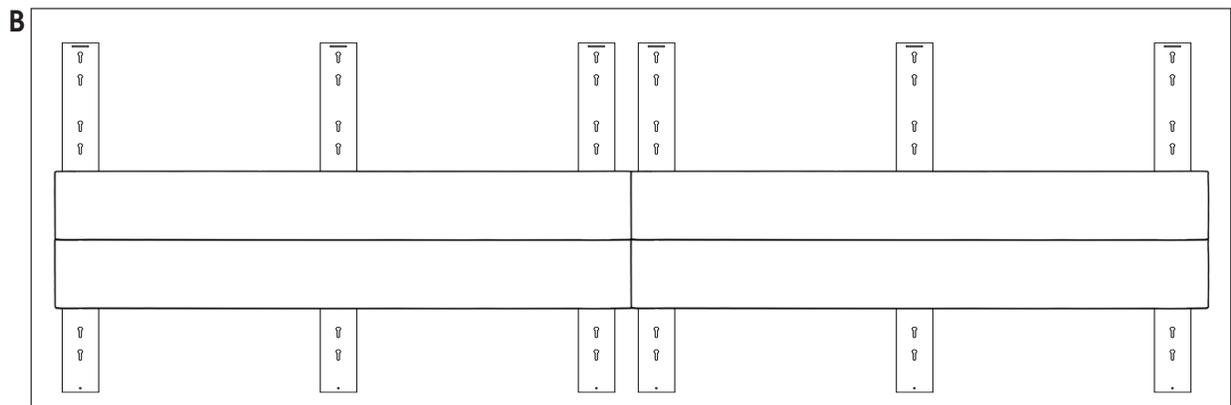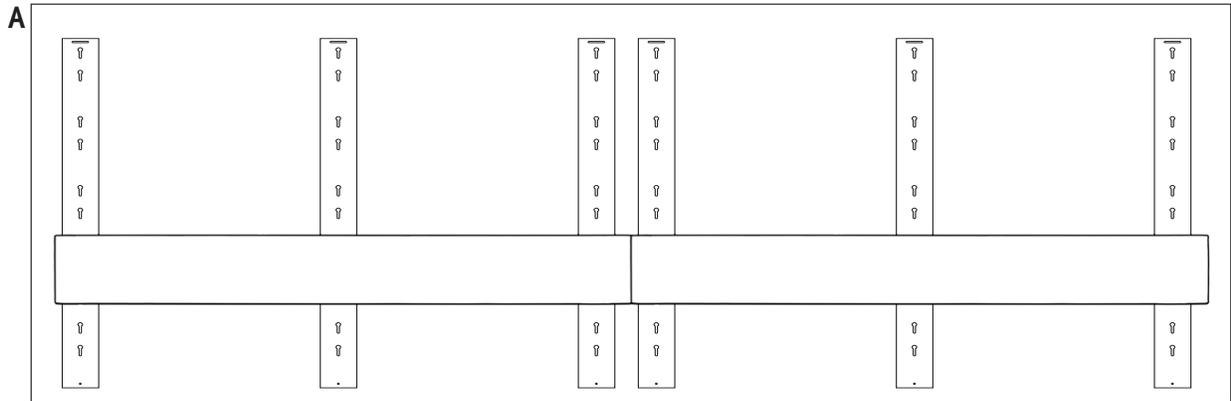


Step 10: Level

Use the provided level on the top-most headboard panels. Shift the uprights until level.


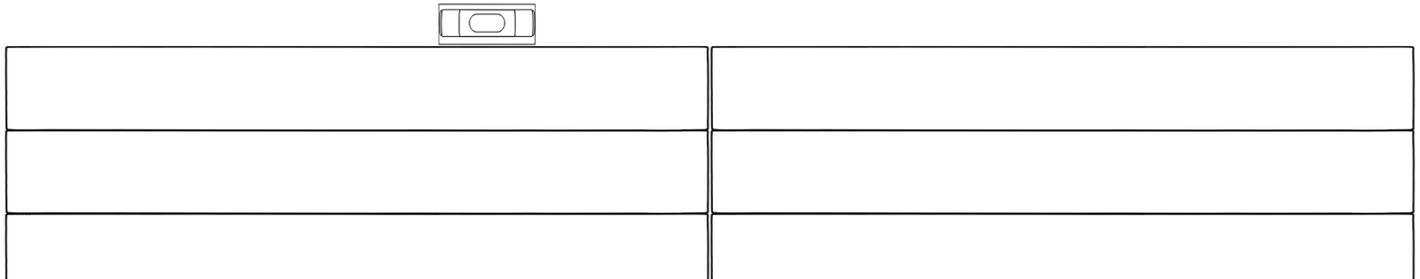


Step 11: Drill Lower Pilot Hole

Screw in provided screws through lower Upright hole just enough to mark the drywall.

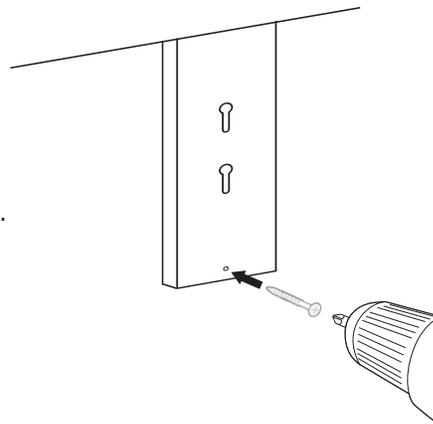


Step 12: Drill Into Drywall

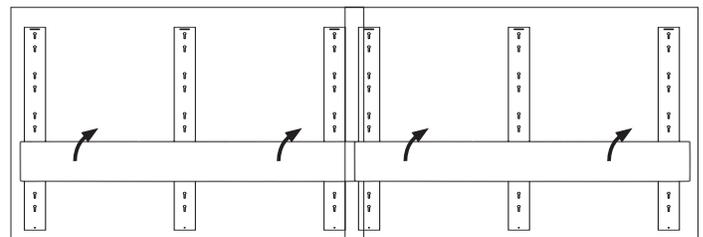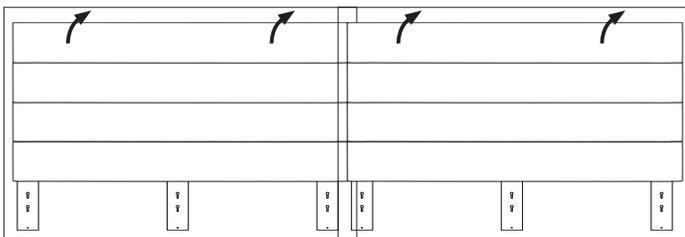


Remove headboard panels by lifting panel up and then pulling out. Start at the top and work your way down.

Rotate Uprights out of the way. Drill the drywall anchors into the pilot holes.

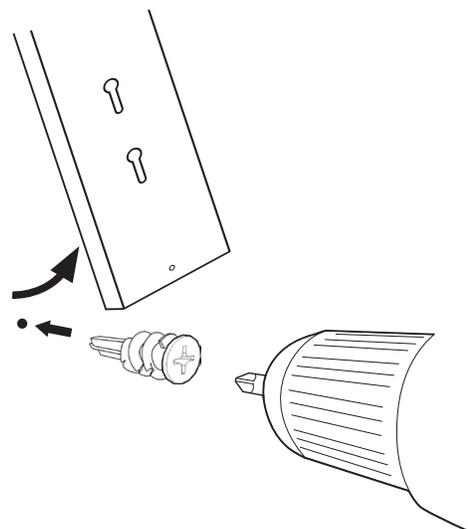


Step 12: Drill Into Drywall (Continued)

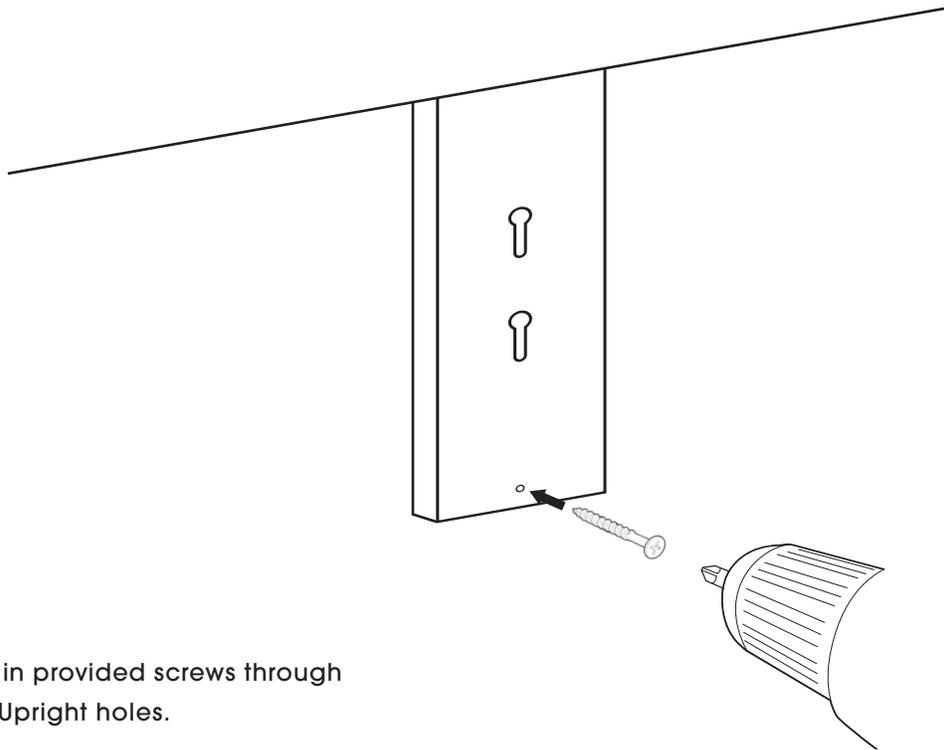

Screw in provided screws through lower Upright holes.

Step 13: Attach Headboard Panels


Once the Uprights are properly anchored to the wall, with the appropriate distance between them, begin attaching each headboard panel from the bottom up.

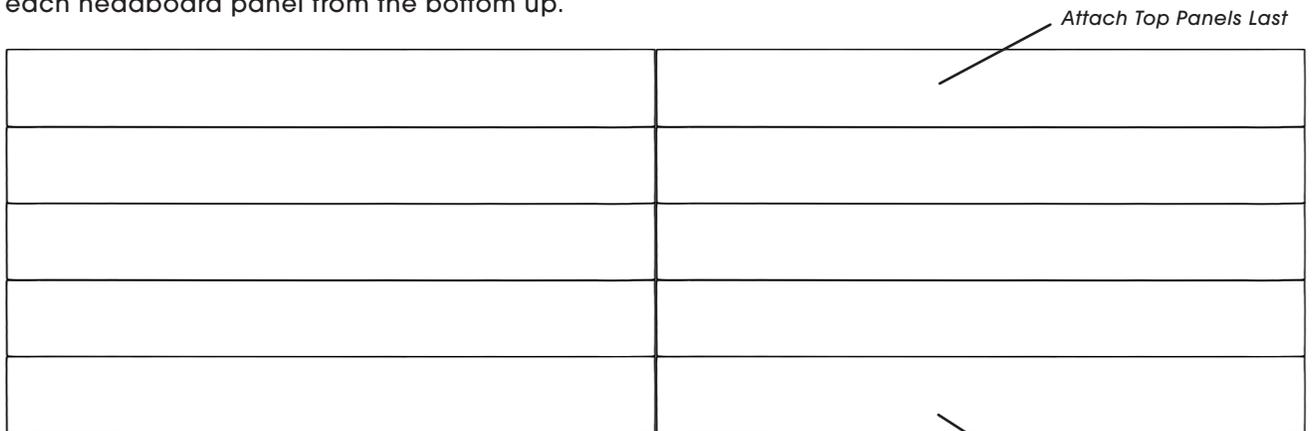

Attach Bottom Panels First

Step 14: Relax

Once all your Headboard Panels are attached,
jump into bed and and enjoy the weather!

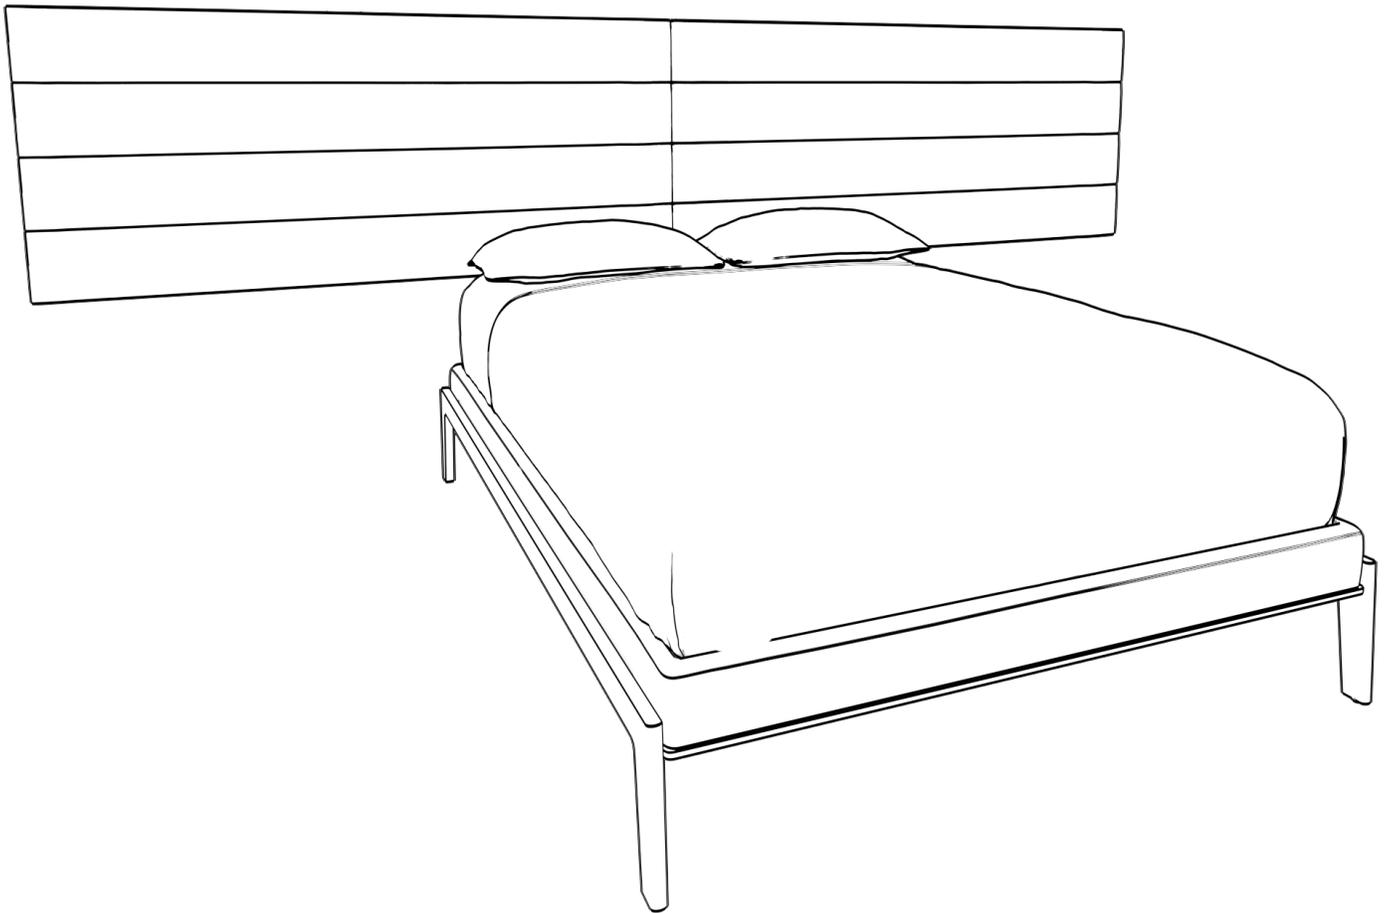

DONE!